

PS08 - REMOVE PORCELAIN WAX

Remove Factory Applied Transport Wax from Porcelain Tiles

PRODUCT: **MICROSCRUB**



EQUIPMENT:

- [AQUABUG CLEANING KIT](#)
- Scrub pad or brush;
- Broom
- Bucket
- Clean water;
- Cotton towels.
- Wet vac;
- Optional: Scrub machine


PRECAUTIONS:

1. Read entire label, SDS & technical bulletin before using;
2. Wear appropriate skin & eye protection;
3. Use when surface temperature is between 4°C & 32°C;
4. Do not allow product to contact any non-recommended surfaces;
5. Take care when using on dark coloured grout or stone;

PROCEDURE:

1. Sweep, vacuum, or wipe surface;
2. Slightly pre-wet surface & grout joints with clean water;
3. Pour approx 1-2 cups of [MICROSCRUB](#) to the pre wet surface;
4. Scrub the surface with a white nylon pad, scrub brush or scrub machine;
5. For vertical surfaces, pre-wet surface by spraying water from a spray bottle then apply [MICROSCRUB](#) directly to a white nylon pad then scrub;
6. **DO NOT ALLOW PRODUCT TO DRY ON THE SURFACE;**
7. Remove the dirty solution with a wet vac or mop;
8. Rinse thoroughly with clean water;
9. Repeat as necessary.

PROCEDURE FOR WALLS

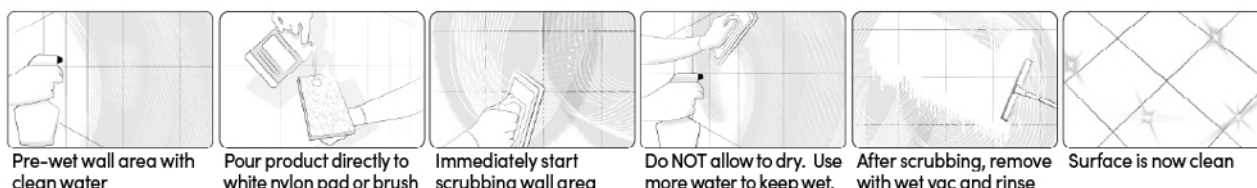

Pre-wet wall area with clean water

Pour product directly to white nylon pad or brush

Immediately start scrubbing wall area

Do NOT allow to dry. Use more water to keep wet.

After scrubbing, remove with wet vac and rinse

Surface is now clean

PROCEDURE FOR FLOORS



Pour product directly to a pre-wet floor

Immediately start scrubbing

For larger areas use a slow speed scrubber;

For dirty grout joints, scrub with a grout brush

After scrubbing, remove with wet vac and rinse

Surface is now clean

Note A: For heavy porcelain wax, refer to Problem Solver [PS09-REMOVE HEAVY PORCELAIN WAX](#).

This recommendation is intended as a general guideline. The actual procedure requirements, dilution ratios, dwell time etc may vary depending on type of surface, method of application and severity of the problem.

READ PRODUCT LABEL INSTRUCTIONS, TECHNICAL BULLETIN & SDS THOROUGHLY BEFORE USING. ALWAYS TEST FIRST. KEEP SURFACE CLEAN AND DRY TO REDUCE THE POSSIBILITY OF SLIP & FALL ACCIDENTS AND INJURIES