PS08 - REMOVE PORCELAIN WAX

Remove Factory Applied Transport Wax from Porcelain Tiles

PRODUCT: MICROSCRUB

EQUIPMENT:

- AquaBug Cleaning Kit
- Scrub pad or brush;
- Broom
- Bucket
- Clean water;
- Cotton towels.
- Wet vac;
- Optional: Scrub machine

PRECAUTIONS:

1. Read entire label, SDS & technical bulletin before using;
2. Wear appropriate skin & eye protection;
3. Use when surface temperature is between 4°C & 32°C;
4. Do not allow product to contact any non-recommended surfaces;
5. Take care when using on dark coloured grout or stone;

PROCEDURE:

1. Sweep, vacuum, or wipe surface;
2. Slightly pre-wet surface & grout joints with clean water;
3. Pour approx 1-2 cups of MicroScrub to the pre wet surface;
4. Scrub the surface with a white nylon pad, scrub brush or scrub machine;
5. For vertical surfaces, pre-wet surface by spraying water from a spray bottle then apply MicroScrub directly to a white nylon pad then scrub;
6. DO NOT ALLOW PRODUCT TO DRY ON THE SURFACE;
7. Remove the dirty solution with a wet vac or mop;
8. Rinse thoroughly with clean water;
9. Repeat as necessary.

PROCEDURE FOR WALLS

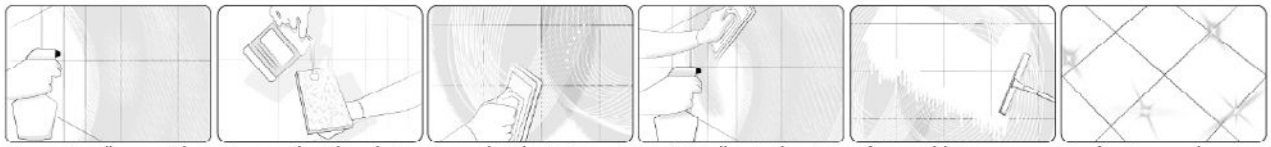

PROCEDURE FOR FLOORS

Note A: For heavy porcelain wax, refer to Problem Solver PS09-Remove Heavy Porcelain Wax.

This recommendation is intended as a general guideline. The actual procedure requirements, dilution ratios, dwell time etc may vary depending on type of surface, method of application and severity of the problem.
READ PRODUCT LABEL INSTRUCTIONS, TECHNICAL BULLETIN & SDS THOROUGHLY BEFORE USING. ALWAYS TEST FIRST.
KEEP SURFACE CLEAN AND DRY TO REDUCE THE POSSIBILITY OF SLIP & FALL ACCIDENTS AND INJURIES

sealersplus
Sealers Plus (A Division of Aqua-Seal)
P: +61 2 9521 4000 Monday to Friday 9.00am - 4.00pm
E: sales@sealersplus.com.au www.sealersplus.com.au
© Copyright April 2021