

COLOUR'N'SEAL

Premium Grout Colourant to Renew, Re-Colour & Seal Grout



COLOUR'N'SEAL is a **Professional Grade** one-part premium grout colourant utilising a **NANOPLUS™** Waterbourne Modified Epoxy formula to re-colour, renew, revive and seal existing grout. Maximum Stain protection against oil, food, grease and grime. For wall, floor, indoor, outdoor, domestic and commercial areas.

USE: Use on textured, sanded, un-sanded and most epoxy grout for a sealed, even coloured, new look grout joint.

TEST FIRST: Always test first in an inconspicuous area to determine ease of application, number of coats, colour stability and desired results. End user must determine suitability of product for their own use.

PRECAUTIONS & SAFETY DIRECTIONS:

1. Read label, SDS and technical bulletin before using;
2. Wear gloves & eye protection;
3. Ensure existing grout sits lower than the tile;
4. Grout must be textured, clean, COMPLETELY dry & free from any sealers and coatings;
5. Use when surface is between 4°C & 28°C;
6. When using contrasting colours, more than 1 coat might be needed - allow 2 hours between each coat.
7. If using more than 1 bottle of a single colour, mix all bottles together in a large container to ensure uniform colour. Check batch before-hand;
8. Textured or porous surfaces require more care when applying Colour'N'Seal. Check for staining and ease of clean-up before-hand;
9. For Shower areas, use a moisture meter to help determine when the grout is COMPLETELY dry and ready to apply Colour'N'Seal;

PREPARATION: Use **OXITREAT+** (for smooth grout to create texture) or **XTREMECLEAN+** (for existing textured grout) to prepare the grout joint. Rinse thoroughly then allow to **COMPLETELY** dry before using **COLOUR'N'SEAL**.

APPLICATION INSTRUCTIONS:

1. SHAKE WELL BEFORE USING;
2. Apply a small amount of product directly onto grout;
3. Work the product along the grout joint in a scrubbing motion using a Colourant Applicator Brush or a kid sized toothbrush - ensure a thin even coat and limit amount of product on tile surface for easier clean up;
4. Immediately wipe off any excess off tile surface with a slightly damp chamois or cloth or paper towels;
5. DO NOT ALLOW TO DRY ON TILES FOR MORE THAN 30 MINUTES AS CLEAN-UP WILL BECOME DIFFICULT.

NOTE: If **COLOUR'N'SEAL** has dried on tiles then spray a fine mist of water. Allow to stand for 3-5 minutes then scrub tiles with a white pad or bristle brush for textured surfaces (SCRUB ACROSS GROUT JOINT - DO NOT SCRUB IN GROUT JOINT).

CURE TIME: Light traffic after 2 hours. Keep dry for minimum 24 hours. Full cure after 24-48 hours. For shower floors or wet areas, allow minimum 48 hours cure time.

LIMITATIONS: Sealer is NOT a waterproofing agent. Do not use in under water or pooling water situations or areas subject to hydrostatic pressure. Spills should be wiped up immediately to help minimise staining. Colour swatches on marketing material are

only indicative and can vary due to printing and screen resolution. Colour and shade variation can occur depending on batch, job site, lighting, surface and surrounding conditions;

EXPECTED WEAR: Will vary depending on traffic wear plus frequency and type of cleaning products used. Harsh cleaning methods including pressure washing, high alkaline, acidic or solvent-based cleaners and/or weather exposure will affect wear. Showers, high traffic and exterior areas will require more frequent re-application. RE-SEAL AS NECESSARY.

COVERAGE: Per 250ml per coat - depending on grout porosity and width, the application method and number of coats required. See table below as a guide (per coat based on 3mm grout joint).

- 200x200mm - 20m2
- 300x300mm - 30m2
- 400x400mm - 40m2
- 600x600mm - 60m2



MAINTENANCE:

1. **EZYCLEAN+** for rinse free cleaning and disinfecting;
2. **XTREMECLEAN+** - for periodic heavy duty cleaning;
3. **GROUT CLEAN PRO+** spray type heavy duty cleaning;

HANDLING, STORAGE & CLEAN UP: Close container tightly after each use & store between 4°C & 32°C; Do not re-use container; Discard in rubbish; Shelf life is approx 3 years unopened; Storage beyond that time does not mean it is not usable. Always do a small test area first; Clean tools & clothes with water before product dries.

FIRST AID: Contact Poisons Information Centre (Australia 131-126, NZ 0800 764-766) or a doctor. If swallowed do NOT induce vomiting. Rinse thoroughly any skin contact. If unwell seek medical advice.

APPLICATION QUICK GUIDE:

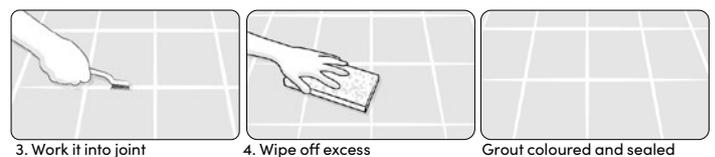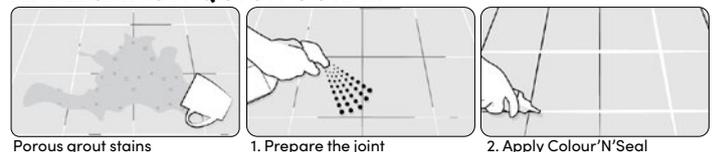

Code	Colour	Code	Colour	Code	Colour
190-001	Black	191-001	Midnight	191-009	Charred Ash
190-002	White	191-002	Slate Grey	192-002	Gunmetal Grey
190-003	Cocoa	191-003	Buff	192-003	Grey
190-004	Linen White	191-004	Misty Grey	192-004	Silver Grey
190-006	Antique White	191-005	Magellan Gray	192-005	Vanilla
190-008	Silver	191-006	Travertine	192-007	Light Grey
190-010	Canvas	191-007	Havanna	192-008	Mocha
190-011	Ultra White	191-008	Alabaster		

PRODUCT WARRANTY - SEALERS PLUS (A Division of Aqua-Seal STS™) "The Manufacturer" warrants to the original purchaser of its products that such products are free from manufacturing defect and does not warrant or guarantee the workmanship performed by any person or firm installing its products. The manufacturer's obligation under this warranty is limited solely to the original purchaser and solely shall be limited to the replacement of the product sold or refund. This warranty will not extend to any product which has been modified in any way or which has not been used in accordance with the printed instructions. The manufacturer makes no other warranties either expressed or implied. The end user must determine the suitability of the product for their intended use. ALWAYS READ ENTIRE LABEL, SDS & TECHNICAL BULLETIN BEFORE USE & TEST FIRST.



SEALERS PLUS (AN AQUA-SEAL BRAND)

P: +61 2 9521 4000 Mon - Fri 9.00am-4.00pm E: sales@sealersplus.com.au

AUS: www.sealersplus.com.au NZ: www.sealersplus.co.nz Global: www.sealersplus.com



© Copyright July 2022